

Zafra




An attractive slimline, general purpose range of walk-over, available in a wide range of lamp technologies including metal halide and compact fluorescent. Suitable for hotels, prestigious building entrances, routing indicators, landscape features, shopping malls and other retail areas.

- Marine grade stainless steel cover plate
- Impact resistant 13mm glass diffuser
- Optional anti-vandal screw fixing
- Twin cable entry points
- Robust construction
- IP67

SPECIFICATION




To specify state the following:

An IP67 stainless steel cover plate, white polyester powder coated die-cast aluminium body. 13mm toughened glass, impact resistant, diffuser. Choice of metal halide, compact fluorescent, GLS or LED (Light Emitting Diode) lamp technologies. Metal halide control gear is complete with timed ignitor.

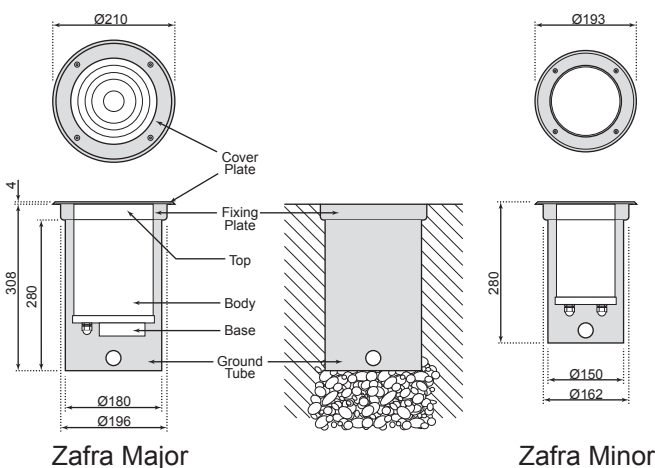

Zafra Major

Zafra Minor





Materials and Design

Polyester powder coated, die-cast aluminium white base and stainless steel cover plate. A 13mm toughened glass diffuser and plated steel gear tray. Extruded PVC ground tube.

Installation

The Zafra is installed in concrete in a hole with the bottom edge of the cover plate oriented flush with the ground. This hole has to be lined with sufficient fine shingle to allow the effective drainage of any rain water.

Electrical

Cable entry to the body is via a 20.0mm compression cable gland in the bottom of the base. (An additional blanking plate plug is also situated in the base for through connection.) Electrical connections are via either a 3 way polyamide screwed terminal strip or a fused terminal strip which is available on request. 240 Volt, 50Hz nominal supply.

Classification for Protection

Against electric shock Class 1 protected with earthed metalwork. It is important that this product is electrically installed according to the relevant IEE Regulations. Against ingress of dust and moisture IP67 Technical Specification.

Standards

The Zafra range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Ordering Information

(Luminaires supplied c/w lamps)

	Walk-over Major	Code	Weight (kg)
10W	Compact fluorescent c/w switch start ballast and lamp	WOZ10L	4.5
13W	Compact fluorescent c/w switch start ballast and lamp	WOZ13L	4.5
18W	Compact fluorescent c/w switch start ballast and lamp	WOZ18L	4.5
26W	Compact fluorescent c/w switch start ballast and lamp	WOZ26L	4.5
35W	Ceramic Metal Halide c/w integral gear, timed ignitor and G12 lamp	WOZH35TLC	4.5
<5W	Light Emitting Diode (LED). An array of 25 super bright LED's 5000mcd each c/w power unit. Less than 5W total power dissipation. Available in red, blue, green and yellow. Specify colour when ordering.	WOLZ25RD WOLZ25BL WOLZ25GR WOLZ25YE	4.5
	Walk-over Minor	Code	Weight (kg)
<5W	Light Emitting Diode (LED). An array of 25 super bright LED's 5000mcd each c/w power unit. Less than 5W total power dissipation. Available in red, blue, green and yellow. Specify colour when ordering.	WOLMZ25RD WOLMZ25BL WOLMZ25GR WOLMZ25YE	4.5