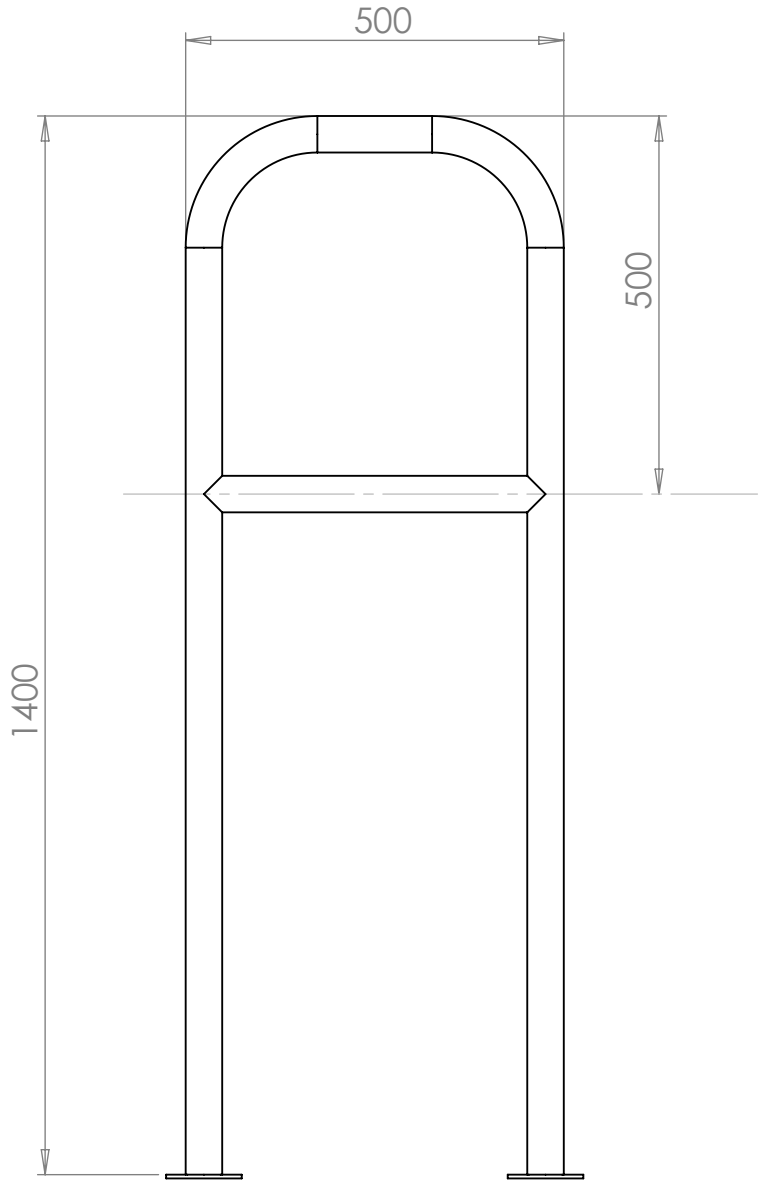

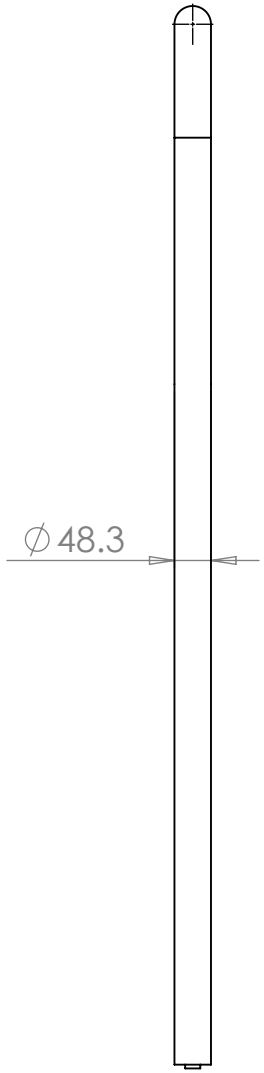

PRODUCT SPECIFICATION

Door Pro 48

- Constructed using 48mm diameter, mandrel-bent mild steel.
- Galvanised to BSENISO1461 providing long lasting corrosion resistance
- Central rubber buffer at top protects rail & door in the event of a collision.
- Includes a tapping rail 500mm from top.
- Flush 6mm gauge galvanised lid
- 5mm gauge galvanised outer casing
  Flush 6mm gauge galvanised lid
- 20x5mm flat bar welded to bottom of tube provide solid below ground root fix anchor point.

Option: Stainless steel grade 316 or grade 304

RAMGroup UK

RAM Group UK
Head Office
Newby Road Industrial Estate
Hazel Grove
Stockport
SK7 5DL

Tel: +44 (0)161 482 4001
Fax: +44 (0)161 482 4041
Email: ramgroup@btconnect.com